PROJECT: QTO SYNTHETIC BLUEPRINT TEST SUITE

SHEET A-103: FRAMING PLAN WITH LUMBER CALLOUTS

SCALE: 1/8" = 1'-0"

GENERAL FRAMING NOTES & SCHEDULE
1. WALL TAG 1A: 3-5/8" METAL STUDS @ 16" O.C. WITH 5/8" TYPE X GWB.
2. WALL TAG 2B: 6" METAL STUDS @ 16" O.C. WITH 5/8" TYPE X GWB.
3. PROVIDE 2X4 WOOD BLOCKING FOR ALL WALL-MOUNTED CASEWORK.
4. PROVIDE 2X6 WOOD BLOCKING FOR GRAB BARS AND TOILET ACCESSORIES.
5. 2X4 STUDS @ 24" O.C. AT CHASE WALL INFILL.
6. 2X6 HEADER OVER EQUIPMENT OPENING.

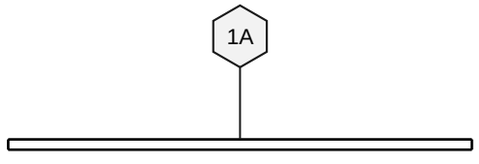

2X4 @ 16" O.C.

2X4 BLOCKING IN WALL

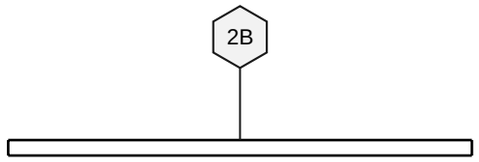

2X6 @ 24" O.C.

2X6 SILL PLATE BELOW