PROJECT: QTO SYNTHETIC BLUEPRINT TEST SUITE

SHEET A-102: FLOOR PLAN - 20FT PARTITION WITH 3FT DOOR

SCALE: 1/8" = 1'-0"
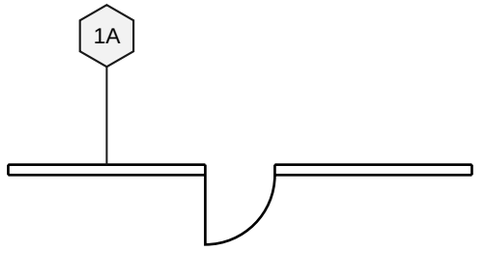
PARTITION SCHEDULE
TAG: 1A
DESCRIPTION: 3-5/8" METAL STUDS @ 16" O.C. WITH 1 LAYER 5/8" TYPE X GWB EACH SIDE.
HEIGHT: 10'-0" AFF.
DOOR OPENING: 3'-0" X 7'-0" HOLLOW METAL DOOR.